



Item Checklist

- GC-SATA Card x 1
- Power Cable & SATA Cable x 1


GC-SATA Card Layout

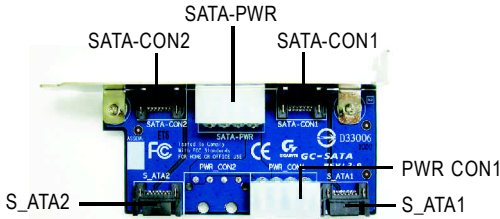


Cable Installation




Step 1




Step 2



Step 3



Step 4



Step 5

Step 1:

Please insert and fix the GC-SATA Card in the back panel of the case.

Step 2: (Internal cable install)

Connect the SATA Cable into the SATA_1 connector on the Motherboard.

Step 3: (Internal cable install)

Connect the other side of SATA cable into the SATA_1 connector on the GC-SATA Card. And connect the power supply connector at PWR CON1 on the GC-SATA Card.

Step 4: (External cable install)

Connect both the SATA HDD and the GC-SATA card with the same power cable in bundle. (Connector : SATA-PWR to HDD SATA-PWR or 1-4 power connector--see Step 5)




S_ATA1+ PWR CON1 only for SATA-PWR+ SATA-CON1

S_ATA2+ PWR CON1 only for SATA-PWR+ SATA-CON2


清點附件

- ☑ GC-SATA Card x 1
- ☑ Power Cable & SATA Cable x 1


GC-SATA Card Layout 圖

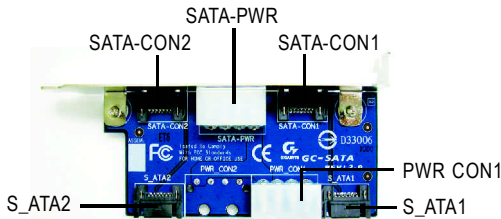


排線安裝方式




步驟 1




步驟 2



步驟 3



步驟 4



步驟 5

步驟 1:

先將 GC-SATA 卡鎖住固定在電腦機殼背板上。

步驟 2: (內建排線安裝)

將 SATA Cable 的一端插在內建主機板 SATA_1 的插座上。

步驟 3: (內建排線安裝)

再將 SATA Cable 的另一端插在 GC-SATA 卡上的 SATA_1 的插座上，並接上電源供應器之接頭在 GC-SATA 卡上 PWR CON1 的位置。

步驟 4: (外接排線安裝)

將 Power Cable 的一端插在 GC-SATA 卡上的 SATA-PWR 的插座上，另一端接上有支援 SATA 功能硬碟之 SATA-PWR 接頭(或接 1 對 4 舊式電源接頭 -- 見步驟 5)上，再將 SATA Cable 接在卡上 SATA-CON1 及硬碟的 SATA-CON 接頭。



S_ATA1+ PWR CON1 只對應於 SATA-PWR+ SATA-CON1

S_ATA2+ PWR CON1 只對應於 SATA-PWR+ SATA-CON2