

GV-NX84S256HP/ GV-NX84S256HE/ GV-NX84S512HP/ GV-NX84S512H

GeForce™ 8400 GS Graphics Accelerator

User's Manual

Rev. 106

12MM-NX84S2HP-106R

Copyright

© 2009 GIGABYTE TECHNOLOGY CO., LTD

Copyright by GIGA-BYTE TECHNOLOGY CO., LTD. ("GBT"). No part of this manual may be reproduced or transmitted in any form without the expressed, written permission of GBT.

Trademarks

Third-party brands and names are the properties of their respective owners.

Notice

Please do not remove any labels on this graphics card. Doing so may void the warranty of this card.

Due to rapid change in technology, some of the specifications might be out of date before publication of this manual. The author assumes no responsibility for any errors or omissions that may appear in this document nor does the author make a commitment to update the information contained herein.

Macrovision corporation product notice:

This product incorporates copyright protection technology that is protected by U.S. patents and other intellectual property rights. Use of this copyright protection technology must be authorized by Macrovision, and is intended for home and other limited viewing uses only unless otherwise authorized by Macrovision. Reverse engineering or disassembly is prohibited.

Declaration of Conformity

(Full address)

G.B.T. Technology Trading GmbH
Bullerweg 10, 70372 Stuttgart, Germany

(description of the apparatus, system, installation to which it refers)

GV-NX84S256HP/GV-NX84S256HE

VGA Card

(reference to the applicable conformity standard)
is in conformity with
in accordance with 2004/108/EC EMC Directive

<input type="checkbox"/> EN 55011	Limits and methods of measurement of radio disturbance characteristics of industrial, scientific and medical (ISM) High Frequency equipment	<input checked="" type="checkbox"/> EN 61000-3-2	Disturbance in supply systems caused by harmonics
<input type="checkbox"/> EN 55013	Limits and methods of measurement of radio disturbance characteristics of broadcast receivers and associated equipment	<input checked="" type="checkbox"/> EN 61000-3-3	Disturbance in supply systems caused by harmonics and interharmonics electrical equipment "Voltage fluctuations"
<input type="checkbox"/> EN 55014-1	Limits and methods of measurement of radio disturbance characteristics of portable tools and similar electrical apparatus	<input checked="" type="checkbox"/> EN 50264	Information Technology equipment-immunity characteristics-Limits and methods of measurement
<input type="checkbox"/> EN 55015	Limits and methods of measurement of fluorescent lamps and luminaires	<input checked="" type="checkbox"/> EN 50085-1	Generic immunity standard Part 1: Residual, commercial and light industry
<input type="checkbox"/> EN 55020	Immunity from radio interference of broadcast receivers and associated equipment	<input checked="" type="checkbox"/> EN 50085-2	Generic immunity standard Part 2: Industrial environment
<input type="checkbox"/> EN 55022	Limits and methods of measurement of radio disturbance characteristics of information technology equipment	<input type="checkbox"/> EN 55014-2	Immunity requirements for household appliances and similar apparatus
<input type="checkbox"/> DIN VDE 0855 Part 10	Child distribution systems: Equipment for receiving audio distribution from sound and television signals	<input type="checkbox"/> EN 50091-2	EMC requirements for unremovable power systems (UPS)
<input type="checkbox"/> EN 60335	Safety of household and similar consumer appliances		
<input type="checkbox"/> EN 60085	Safety requirements for mains operated household and similar general use	<input checked="" type="checkbox"/> EN 60950	Safety for information technology equipment including business equipment
<input type="checkbox"/> EN 60335	Safety of household and similar consumer appliances	<input type="checkbox"/> EN 50091-1	General and Safety requirements for unremovable power systems (UPS)



(EC conformity marking)

The manufacturer also declares the conformity of above mentioned product with the actual required safety standards in accordance with LVD 89/368/EEC

Safety for information technology equipment including business equipment
General and Safety requirements for unremovable power systems (UPS)

Manufacturer/Importer

Signature: Timmy Huang

(Stamp)

Date: Dec. 24, 2007

Name: Timmy Huang

DECLARATION OF CONFORMITY

Per FCC Part 2 Section 2.1077(a)



Responsible Party Name: **G.B.T. INC. (U.S.A.)**

Address: **17358 Railroad Street**

City of Industry, CA 91748

Phone/Fax No: (818) 854-9338/ (818) 854-9339

hereby declares that the product

Product Name: VGA Card

**Model Number: GV-NX84S256HP/
GV-NX84S256HE**

Conforms to the following specifications:

FCC Part 15, Subpart B, Section 15.107(a) and Section 15.109

(a), Class B Digital Device

Supplementary Information:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful and (2) this device must accept any interference received, including that may cause undesired operation.

Representative Person's Name: ERIC LU

Signature: Eric Lu

Date: Dec. 24, 2007

Declaration of Conformity

Wm. Manufacturer/Importer
(Full address)

G.B.T. Technology Trading GmbH
Bullerweg 10, 42699 Solingen, Germany

(description of the apparatus, system, installation to which it refers)

VGA Card

GV-NX84S512HP

(reference to the applicable standard(s) to which conformity is declared)

is in conformity with

in accordance with 2004/108/EC EMC Directive

EN 55011

Limits and methods of measurement of radio disturbance characteristics of industrial, scientific and medical (ISM) High Frequency equipment

EN 61000-3-2
 EN 61000-3-3

EN 55013

Limits and methods of measurement of radio disturbance characteristics of broadcast receivers and associated equipment

EN 55024

EN 55014-1

Limits and methods of measurement of radio disturbance characteristics of household appliances and similar electrical apparatus

EN 50085-1
 EN 50085-2

EN 55015

Limits and methods of measurement of radio disturbance characteristics of fluorescent lamps and luminaires

EN 55014-2
 EN 50091-2

EN 55020

Immunity from radio interference of household appliances and associated equipment

EN 55022

Limits and methods of measurement of radio disturbance characteristics of information technology equipment

DIN VDE 0855
 Part 10
 Part 12

Child distribution systems: Equipment for receiving audio distribution from sound and television signals



(EC conformity marking)

The manufacturer also declares the conformity of above mentioned product with the actual required safety standards in accordance with LVD 89/368/EEC

EN 60085

EN 60950

EN 50091-1

Safety requirements for mains operated household and similar general use equipment

Manufacturer/Importer

Signature: Timmy Huang

(Stamp)

Date: Jul. 31, 2008

Name: Timmy Huang

DECLARATION OF CONFORMITY

Per FCC Part 2 Section 2.1077(a)



Responsible Party Name: G.B.T. INC. (U.S.A.)

Address: 17358 Railroad Street

City of Industry, CA 91748

Phone/Fax No: (818) 854-9338/ (818) 854-9339

hereby declares that the product

Product Name: VGA Card

Model Number: GV-NX84S512HP

Conforms to the following specifications:

FCC Part 15, Subpart B, Section 15.107(a) and Section 15.109

(a), Class B Digital Device

Supplementary Information:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful and (2) this device must accept any interference received, including that may cause undesired operation.

Representative Person's Name: ERIC LU

Signature: Eric Lu

Date: Jul. 31, 2008

Declaration of Conformity

Wm. Manufacturer/Importer
(Full address)

G.B.T. Technology Trading GmbH
Bullerstrasse 10, 40549 Düsseldorf, Germany

(description of the apparatus, system, installation to which it refers)

VGA Card

GV-NX84512H

(reference to the applicable standard(s) to which conformity is declared)
in accordance with 2004/108/EC EMC Directive

is in conformity with

<input type="checkbox"/> EN 55011	Limits and methods of measurement of radio disturbance characteristics of industrial, scientific and medical (ISM) High Frequency equipment	<input checked="" type="checkbox"/> EN 61000-3-2	Disturbances in supply systems caused by harmonics	<input checked="" type="checkbox"/> EN 61000-3-3	Disturbances in supply systems caused by harmonics
<input type="checkbox"/> EN 55013	Limits and methods of measurement of radio disturbance characteristics of broadcast receivers and associated equipment	<input checked="" type="checkbox"/> EN 50264	Information technology equipment-immunity characteristics-Limits and methods of measurement	<input type="checkbox"/> EN 50085-1	Generic immunity standard Part 1: Residual, commercial and light industry
<input type="checkbox"/> EN 55014-1	Limits and methods of measurement of radio disturbance characteristics of portable tools and similar electrical apparatus	<input type="checkbox"/> EN 50085-2	Generic immunity standard Part 2: Industrial environment	<input type="checkbox"/> EN 50091-2	EMC requirements for unshielded power systems (UPS)
<input type="checkbox"/> EN 55015	Limits and methods of measurement of radio disturbance characteristics of fluorescent lamps and luminaires	<input type="checkbox"/> EN 50091-1	EMC requirements for unshielded power systems (UPS)	<input type="checkbox"/> EN 50091-2	EMC requirements for unshielded power systems (UPS)
<input type="checkbox"/> EN 55020	Immunity from radio interference of broadcast receivers and associated equipment	<input type="checkbox"/> EN 50091-2	EMC requirements for unshielded power systems (UPS)	<input type="checkbox"/> EN 50091-2	EMC requirements for unshielded power systems (UPS)
<input type="checkbox"/> EN 55022	Limits and methods of measurement of radio disturbance characteristics of information technology equipment	<input type="checkbox"/> EN 50091-2	EMC requirements for unshielded power systems (UPS)	<input type="checkbox"/> EN 50091-2	EMC requirements for unshielded power systems (UPS)
<input type="checkbox"/> DIN VDE 0885	Child distribution systems: Equipment for receiving audio distribution from sound and television signals	<input type="checkbox"/> EN 50091-1	Immunity requirements for household appliances tools and similar apparatus	<input type="checkbox"/> EN 50091-1	General and Safety requirements for unshielded power systems (UPS)
<input type="checkbox"/> Part 10		<input type="checkbox"/> EN 50091-1	Immunity requirements for household appliances tools and similar apparatus	<input type="checkbox"/> EN 50091-1	General and Safety requirements for unshielded power systems (UPS)
<input type="checkbox"/> Part 12		<input type="checkbox"/> EN 50091-1	Immunity requirements for household appliances tools and similar apparatus	<input type="checkbox"/> EN 50091-1	General and Safety requirements for unshielded power systems (UPS)
<input type="checkbox"/> CE marking		<input type="checkbox"/> EN 50091-1	Immunity requirements for household appliances tools and similar apparatus	<input type="checkbox"/> EN 50091-1	General and Safety requirements for unshielded power systems (UPS)



(EC conformity marking)

The manufacturer also declares the conformity of above mentioned product with the actual required safety standards in accordance with LVD 89/368/EEC

Safety requirements for mains operated household and similar optional use

Safety requirements for mains operated household and similar optional use

Safety of household and similar consumer appliances

Manufacturer/Importer

Signature: Timmy Huang

Date: Dec. 5, 2008

Name: Timmy Huang

(Stamp)

DECLARATION OF CONFORMITY

Per FCC Part 2 Section 2.1077(a)



Responsible Party Name: G.B.T. INC. (U.S.A.)

Address: 17358 Railroad Street

City of Industry, CA 91748

Phone/Fax No: (818) 854-9338/ (818) 854-9339

hereby declares that the product

Product Name: VGA Card

Model Number: GV-NX84512H

Conforms to the following specifications:

FCC Part 15, Subpart B, Section 15.107(a) and Section 15.109

(a), Class B Digital Device

Supplementary Information:

This device complies with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful and (2) this device must accept any interference received, including that may cause undesired operation.

Representative Person's Name: ERIC LU

Signature: Eric Lu

Date: Dec. 5, 2008

Table of Contents

1. Introduction	6
1.1. Features	6
1.2. Minimum System Requirements	6
2. Hardware Installation	7
2.1. Board Layout	7
2.2. Hardware Installation	10
3. Software Installation	14
3.1. Windows® XP Driver and Utilities Installation	14
3.1.1. Operating System Requirements	14
3.1.2. DirectX Installation	15
3.1.3. Driver Installation	16
3.1.4. Utilities on Driver CD	18
3.1.5. Taskbar Icons	20
3.1.6. Display Properties Pages	23
3.1.7. nView Properties Pages ^(Note)	33
3.2. Windows® 2000 Driver Installation	38
4. Troubleshooting Tips	39
5. Appendix	39
5.1. How to Reflash the BIOS in MS-DOS Mode	39
5.2. Resolutions and Color Depth Tables (In Windows XP)	40
5.3. Regulatory Statements	42

(Note) This item will show up when you connect two monitors.

1. Introduction

1.1. Features

- The graphics card supports NVIDIA TurboCache technology, which enhances graphics card performance by allowing the graphics processing unit (GPU) to dynamically share the available system memory. The total effective VGA memory differs depending on system memory. See the following table for details:

System Memory	256 MB	512 MB	1 GB or above
Onboard Graphics Memory (a)	256 MB	256 MB	256 MB
Allocated System Memory (b)	0 MB	0 MB	256 MB
Total Effective Graphics Memory (a)+(b)	256 MB	256 MB	512 MB

- Powered by NVIDIA® GeForce™ 8400 GS Graphics Processing Unit (GPU)
- Supports PCI Express 2.0
- Integrated with 256 MB GDDR2 memory (for GV-NX84S256HP/GV-NX84S256HE only)
- Integrated with 512 MB GDDR2 memory (for GV-NX84S512HP/GV-NX84S512H only)
- Supports DirectX 10
- Supports AV output (for GV-NX84S256HE/GV-NX84S512H only)
- Supports 1 Dual-Link DVI-I connector
- Supports 1 D-Sub connector
- Supports AV / S-Video / TV-Out and HDTV output (by adapter)
(for GV-NX84S256HP/ GV-NX84S512HP only)
- Supports HDCP (High-Bandwidth Digital Content Protection) technology



1.2. Minimum System Requirements

- **Hardware**
 - Intel® Pentium® 4 or AMD Athlon™
 - 128 MB of system memory; 2 GB or more for best performance
 - Optical drive for software installation (CD-ROM or DVD-ROM drive)
 - A power supply with 300-watt is recommended
- **Operating System**
 - Windows® Vista
 - Windows® XP with Service Pack 2 (SP2)
 - Windows® XP Professional x64 Edition
 - Windows® 2000

2. Hardware Installation

2.1. Board Layout



1. GV-NX84S256HP/GV-NX84S512HP

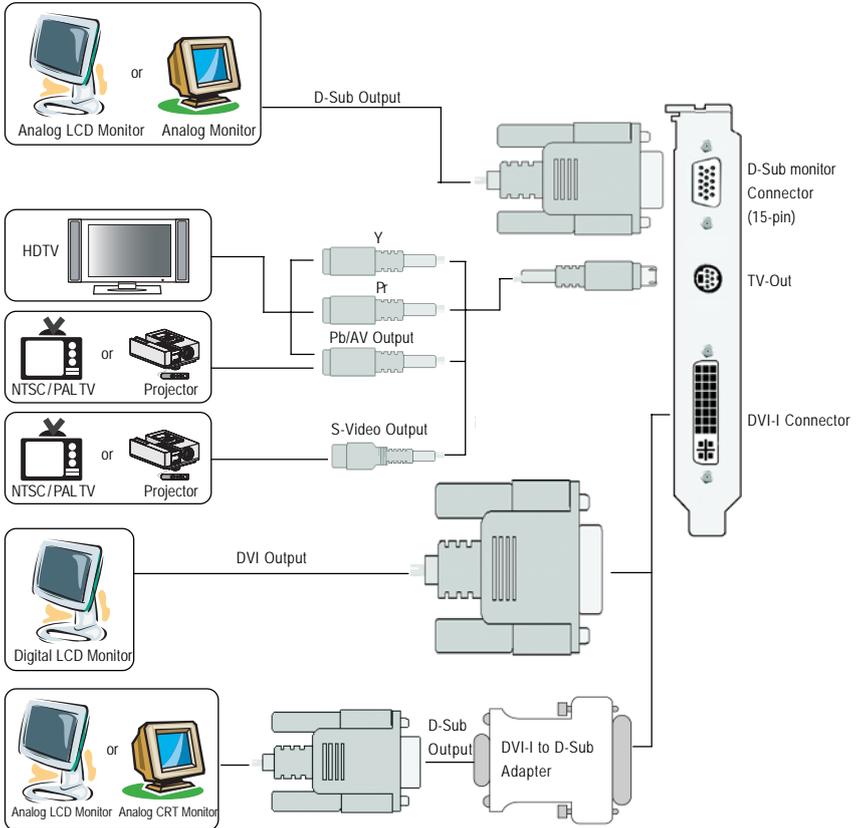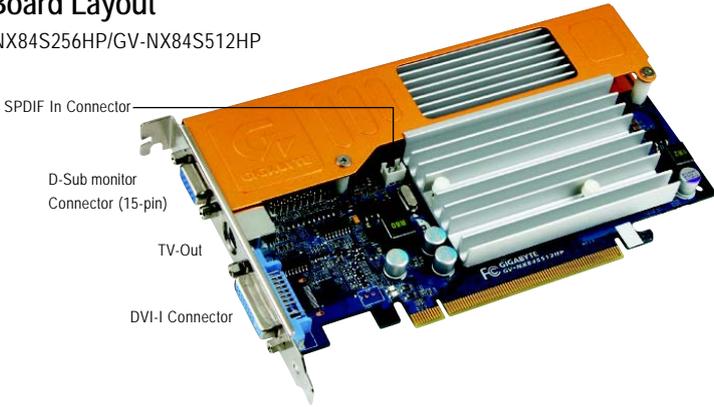

2. GV-NX84S256HE



3. GV-NX84S512H

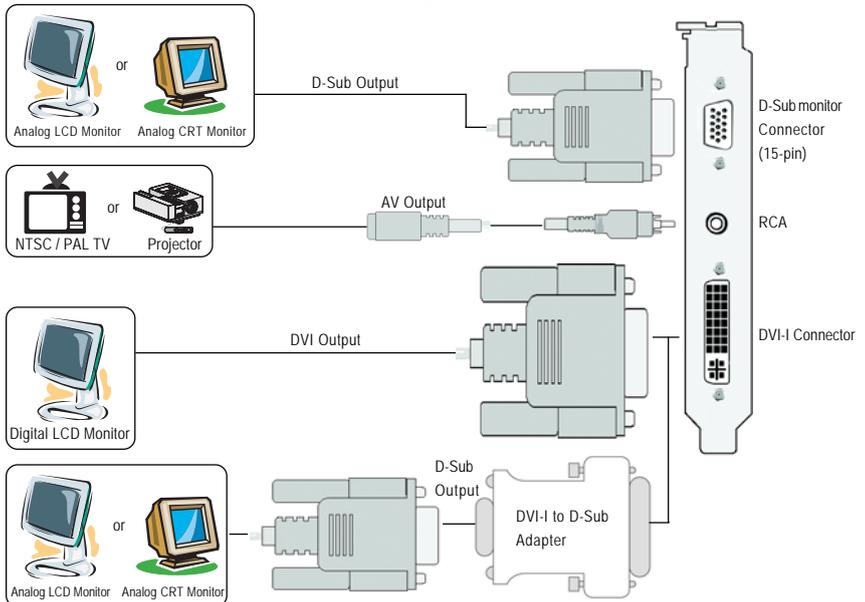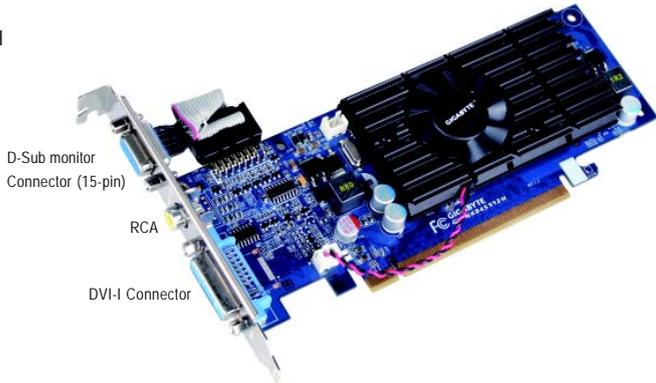



Expansion cards contain very delicate Integrated Circuit (IC) chips. To protect them against damage from static electricity, you should follow some precautions whenever you work on your computer.

1. Turn off your computer and unplug power supply.
2. Use a grounded wrist strap before handling computer components. If you do not have one, touch both of your hands to a safely grounded object or to a metal object, such as the power supply case.
3. Place components on a grounded antistatic pad or on the bag that came with the components whenever the components are separated from the system.

The card contains sensitive electric components, which can be easily damaged by static electricity, so the card should be left in its original packing until it is installed.

Unpacking and installation should be done on a grounded anti-static mat. The operator should be wearing an anti-static wristband, grounded at the same point as the anti-static mat.

Inspect the card carton for obvious damage. Shipping and handling may cause damage to your card. Be sure there are no shipping and handling damages on the card before proceeding.

●* **DO NOT APPLY POWER TO YOUR SYSTEM IF THE GRAPHICS CARD IS DAMAGED.**

●* **In order to ensure that your graphics card can work correctly, please use official GIGABYTE BIOS only. Using non-official GIGABYTE BIOS might cause problem(s) on the graphics card.**

2.2. Hardware Installation

Now that you have prepared your computer, you are ready to install your graphics card.

To remove the existing graphics card:

Step 1.

Power off the computer and monitor, then disconnect the display cable from the back of your computer.




Step 2.

Remove the computer cover. If necessary, consult your computer's manual for help in removing the cover.



Step 3.

Remove any existing graphics card from your computer.



To install your new graphics card:

Step 1.

Locate the PCI Express x16 slot. If necessary, remove the metal cover from this slot; then align your graphics card with the PCI Express x16 slot, and press it in firmly until the card is fully seated.

* Please make sure that the gold edge connector of the graphics card is securely inserted.



Step 2.

Replace the screw to fasten the card in place, and replace the computer cover.



Step 3.

Plug the display cable into your card; then turn on the computer and monitor. If your graphics card came with a DVI-I connector, you can connect a flat panel display to the appropriate connector, as shown below.



To Flat Panel Display



To TV/VCR




To TV/VCR
(for GV-NX84S256HE/
GV-NX84S512H only)



To D-Sub Monitor

You are now ready to proceed with the installation of the graphics card driver. Please refer to next chapter for detailed instructions.

GIGABYTE Video Adapter (for GV-NX84S256HP/ GV-NX84S512HP only)

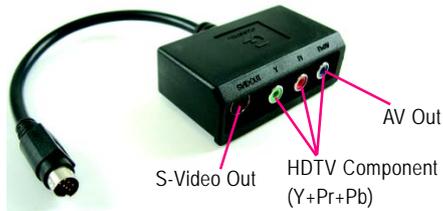

Connect to the TV-Out port on the graphics card.

(1) Connecting HDTV

Connect your HDTV cables to the video adapter according to the corresponding color.

(Y= Green, Pr= Red, Pb= Blue)



(2) Connecting S-Video

If your TV has a S-Video connection, connect the S-Video cable from your TV to the S-Video Out port on the adapter.




(3) Connecting AV Output

If your TV has a Composite video connection, you can connect the RCA cable from your TV to the AV Out port on the adapter.




GIGABYTE Thermal Solution Guidelines:

1. GIGABYTE established the use of silent pipes on graphics card's thermal solution, and has been the leading company for silent thermal solution. GIGABYTE's passive thermal solution allows system to work perfectly in chassis with 40-50 degrees Celsius through the air flow of the system. Please beware of the other excess component or insufficient system thermal design that may cause high system temperature. Excess high temperature will affect the passive thermal design and thus compromising system stability.
2. GIGABYTE TECHNOLOGY's passive thermal design effectively implemented heat exchange, radiation and convection to improve stability of the system. Please maintain passive thermal sink at a normal and clean environment. Extra dust on heatsink may decrease the effectiveness of the thermal design.



Silent Thermal Technology



Passive Thermal Design

3. Software Installation

In this manual, we assume that your CD-ROM drive letter to be Drive D:

The installation of Windows 2000 / Windows XP drivers is very simple. When you insert the driver CD into your CD-ROM drive, you can see the autorun window (if it does not show up, run "D:\setup.exe"). Then you can follow the instructions to setup your graphics card driver. (Please follow the subsection "3.1.3 Driver Installation" to install the driver for your graphics card.)

3.1. Windows® XP Driver and Utilities Installation

3.1.1. Operating System Requirements

Notice the following guidelines before installing the drivers:

1. First make sure your system has installed DirectX 9.0c or later version.
2. Make sure your system has installed the appropriate motherboard drivers (for the motherboard drivers, please contact the motherboard manufacturer.)

3.1.2. DirectX Installation

Install Microsoft DirectX to enable 3D hardware acceleration support for Windows 2000 or Windows XP to achieve better 3D performance.




For software MPEG support in Windows 2000 or Windows XP, you must install DirectX first. Users who run Windows XP with Service Pack 2 or above do not need to install DirectX separately.




Step 1.

When the autorun window shows up, click the Install DirectX 9 item.



Step 2. Choose I accept the agreement and click the Next button.



Step 3. Click the Next button.



The system is installing the components.



Step 4. Click Finish to restart computer. Then the DirectX 9 installation is completed.

3.1.3. Driver Installation

A. New Hardware Found

When the graphics card is inserted into your computer for the first time, the operating system will detect the graphics card automatically and display a New Hardware Found message. The following are step-by-step installation instructions.

Step 1: Found New Hardware Wizard: Video Controller (VGA Compatible)





Click the **Next** button to install the driver. (Insert the driver CD-ROM that came with your graphics card.)

Or click the **Cancel** button to install the driver from the autorun window.

Step 2: Found New Hardware Wizard: Searching and Installing

The wizard will search for the driver and install it automatically.



Step 3: Found New Hardware Wizard: Finish

Click the **Finish** button to finish the installation.




B. Driver Installation (Autorun Window)

Insert the driver CD-ROM into your CD-ROM drive. The autorun window will appear. If it does not show up, please run "D:\setup.exe".




Step 1.


When the autorun window shows up, click the **Install Display Driver** item.

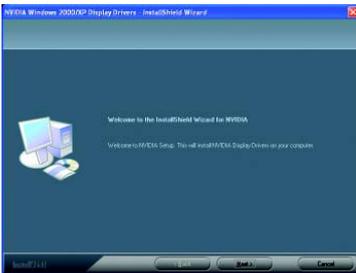

Step 2. Click the **Next** button.

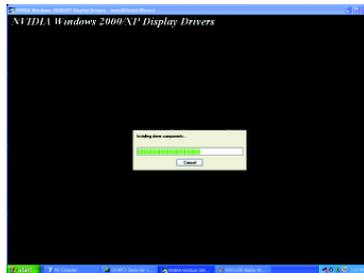

The system is installing the components.

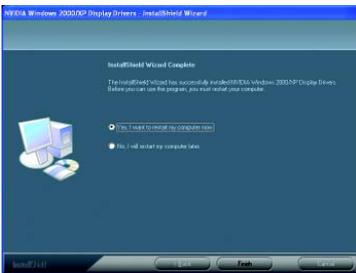


Step 3. Click the **Finish** button to restart the computer. Then the driver installation is completed.

3.1.4. Utilities on Driver CD


Insert the driver CD disk into your CD-ROM, and then you can see the AUTORUN window. If it does not show up, please run "D:\setup.exe".





Step 1. When autorun window shows up, please click the **GIGABYTE Utility** item.



Step 2. Click the **Next** button.




Step 3. Click the **Install** button.



Step 4. Click the **Finish** button to restart computer. Then the utilities installation is completed..

V-Tuner 3

V-Tuner 3 lets you adjust the working frequency of the graphic engine and video memory (Core Clock and Memory Clock).

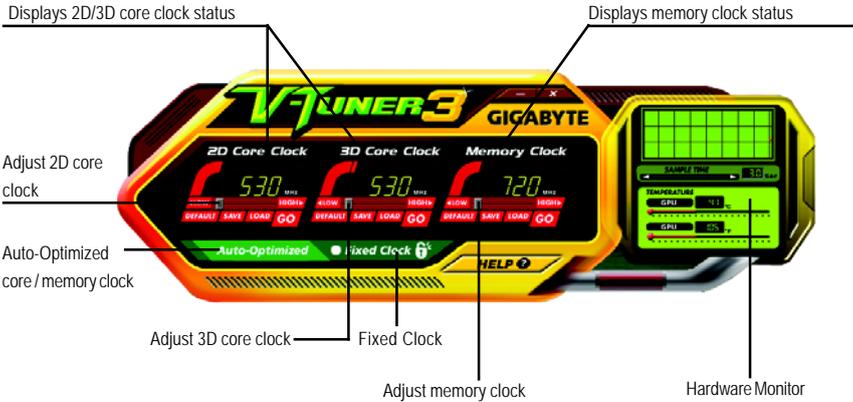

Button	Function
DEFAULT	You may click this button to restore to the default setting
SAVE	You may click this button to save the frequency you wanted
LOAD	After saving the specific value, you may click this button to load the frequency you saved last time
Auto-Optimized	The V-Tuner3 clock configuration utility will determine the recommended GPU and memory clock setting your system. If the utility should hang, restart your system and then enter "Auto-Optimized" mode
Fixed Clock	The V-Tuner3 clock configuration utility will lock the GPU and memory clock you choose, whether you restart your system or not. To rechange clock, uncheck the "Fixed Clock" mode and then adjust
Hardware Monitor	If your card have Hardware Monitor function, you will see the extend window. The window will display the GPU temperature and show the thermal curve. Besides, you can move the slider to adjust the frequency-time temperature of GPU, and you will see the change of thermal curve from now on.
HELP	Opens Help page


3.1.5. Taskbar Icons

After installation of the display drivers, you will find a GIGABYTE icon  on the taskbar's status area. Right-clicking this icon opens the GIGABYTE control panel, showing a menu composed of shortcut of the graphics card's enhanced and other functions.

You may click the Display Properties item, and then click Settings. Click Advanced after clicking Settings. Click the appropriate tab to change your display settings.



Right click the icon.

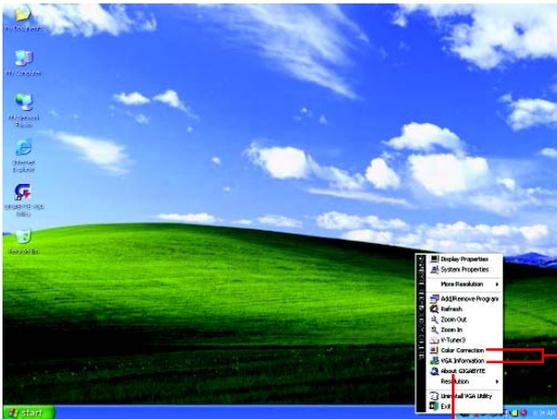

Click the Color Correction and VGA Information items to open the "Color Adjust" and "VGA Info" tabs.

You can link to GIGABYTE website for updated information about the graphics accelerator, latest drivers, and other information.

Color Adjust

Color Adjust allows you to make color adjustments, such as brightness, contrast and gamma values for each or all of RGB colors.



VGA Info

VGA Info lists the relevant information about your card.



After installing the graphics card driver, you will find an NVIDIA icon  in your system tray. Click this icon to open the control panel.



Right click the icon.




You can adjust the properties of the graphics card here.

3.1.6. Display Properties Pages

To access **Display Properties** pages, right-click on desktop and then select **Properties**. The **Display Properties** dialog box shows the information of display adapter, color, the range of display area, and the refresh rate.

Settings (Resolutions and Color Quality for Windows)

You may adjust the screen resolution and color quality settings in this dialog box.

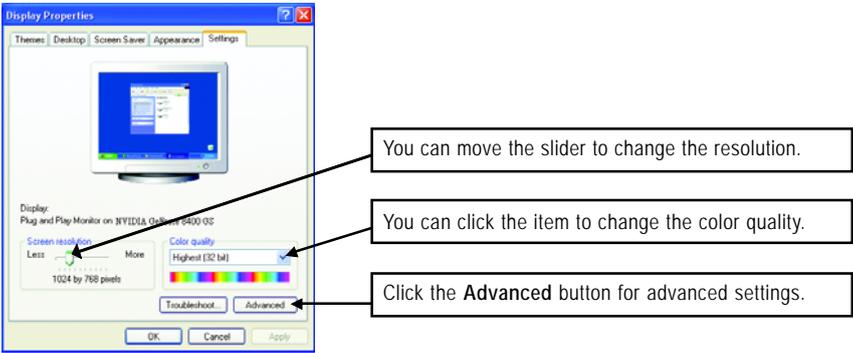

NVIDIA Control Panel

After pressing the **Advanced** button in **Settings**, you'll see the **Plug and Play Monitor and NVIDIA GeForce 8400 GS Properties** dialog box. Click the **GeForce 8400 GS** tab. (You can also click the **NVIDIA** icon on the taskbar and select **NVIDIA Control Panel**.)



Access the **GeForce 8400 GS** tab page to launch the **NVIDIA Control Panel**.

- All of the **NVIDIA** control panels have been consolidated into a single application, the **NVIDIA Control Panel**. Click the **Start the NVIDIA Control Panel** button to open the **NVIDIA Control Panel**.



Select the view of the NVIDIA Control Panel that is most appropriate for you.

- Standard Settings
- Advanced Settings


The following pages provide details on configuring advanced settings.



In the NVIDIA Control Panel, select a category to alter specific NVIDIA display settings.

The categories are:

- 3D Settings
- Display
- Video & Television

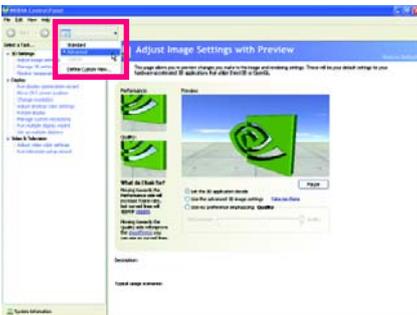

In the NVIDIA Control Panel, change a view if you want.

The supported modes are:

- Standard
- Advanced
- Custom


3D Settings

Tasks in the 3D Settings pages allow you to do the following:


- Change the image and rendering settings of your 3D applications and games that utilize Direct3D and OpenGL technology.
- Assign specific 3D settings to a game so that these settings automatically load when a game is launched.



- **Adjust Image Settings with Preview**
If you are unfamiliar with 3D technology or not an advanced graphics user, use the Adjust Image Settings with Preview page to preview any changes you make for improved image quality and rendering.

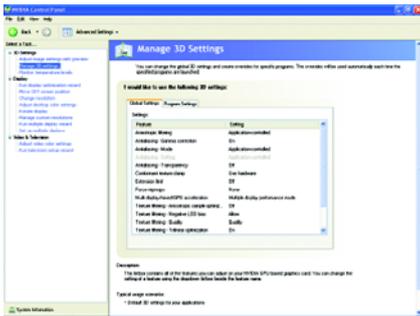

- **Manage 3D Settings (Note)**
The Manage 3D Settings page enables you to establish default 3D settings to use for all your Direct3D or OpenGL applications and to establish a unique set of 3D settings for a particular game or application.

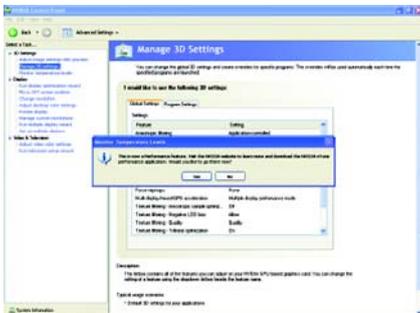

- **Monitor Temperature Levels**
To monitor the current temperature of your NVIDIA GPU using NVIDIA nTune utility, please visit NVIDIA's official web site for more information about nTune.

(Note) This item is present only in Advanced view mode.

Display

A variety of display features enable you to further manipulate and configure your display settings to optimize the use of your displays. Tasks in the Display pages allow you to do the following:

- Run display optimization wizard
- Move CRT screen position
- Change resolution
- Adjust desktop color settings
- Rotate display
- Manage custom resolutions (Note 1)
- Run multiple display wizard (Note 2)
- Set up multiple displays



■ Run Display Optimization Wizard

This wizard helps you adjust your displays for optimal viewing and representation of colors.




■ Move CRT Screen Position

You can use your mouse (by clicking on the arrow keys on this page) or the arrow keys on your keyboard to adjust the position of your desktop to better fit your display. This is a useful alternative to using the controls (buttons) on your actual physical display.

(Note 1) This item is present only in Advanced view mode.


(Note 2) This item will show up when you connect two monitors.

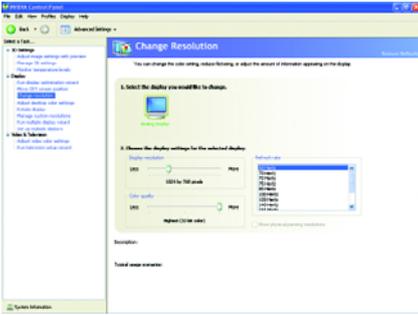


- **Change Resolution**
Using the Change Resolution controls, you can change the color setting, reduce screen flickering, or adjust the amount of information appearing on your display.



- **Adjust Desktop Color Settings**
Use this page to set the contrast, sharpness, and color depth (Digital Vibrance) of the images on your desktop. These changes will not affect any video playback. To change video color settings, go to Adjust Video Color Settings under the Video and TV section from the Start page.

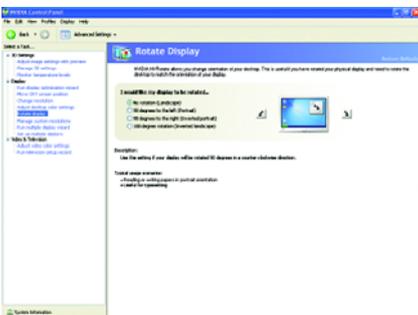

- **Rotate Display**
The NVIDIA Rotate features enable you to change the orientation of your desktop to portrait, landscape, and inverted modes. This is useful if you have rotated your physical display and need to rotate the desktop to match the orientation of your display.

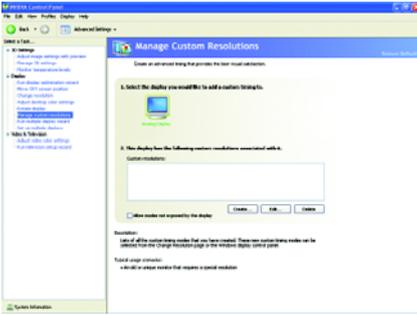


■ Manage Custom Timings ^(Note 1)

If you are an advanced user, you can create custom timing modes with the width, height, bit-color depth, and the refresh rate etc. The Advanced Timing page enables you to adjust timings for your graphics card in order to support a variety of different display timings for ultimate flexibility for analog CRT and DVI connections. You can use the advanced Change Resolution Attributes page to view custom display modes you have saved in the Create Custom Timings page.



■ Run Multiple Display Wizard ^(Note 2)

This wizard will help you enable and customize your multi-display setup.

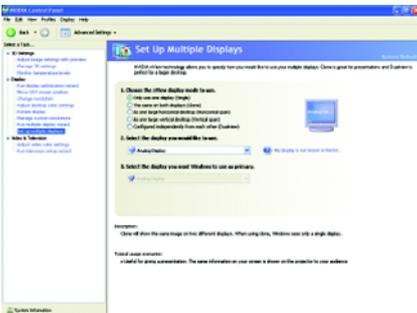

■ Set up Multiple Displays


NVIDIA nView technology enables you to view your desktop in one of several multi-display modes to make the best use of the displays (monitors) that are connected to your computer.

(Note 1) This item is present only in Advanced view mode.

(Note 2) This item will show up when you connect two monitors.

Dual-Monitor Setup

You can set the display to output from two monitors on the Change Display Configuration page.

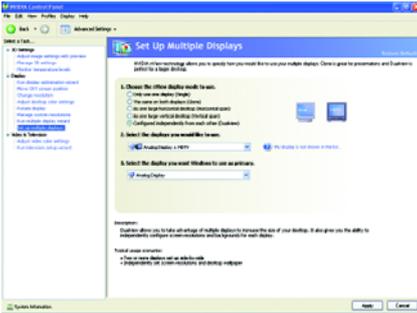

Select your preferred nView display modes here.

- Only use one display (Single)
- The same on both display (Clone)
- As one large horizontal desktop (Horizontal span)
- As one large vertical desktop (Vertical span)
- Configured independently from each other (Dualview)

(1) The same on both display (Clone)

Clone mode indicates that both displays in the display pair show images of the same desktop.



Clone Mode

(2) As one large horizontal desktop (Horizontal span)

Horizontal Span mode indicates that both displays in the display pair function as one wide virtual desktop. The width of each display is half the width of the total virtual desktop width.



Horizontal Span Mode

(3) As one large vertical desktop (Vertical span)

Vertical Span mode indicates that both displays in the display pair function as one tall virtual desktop. The height of each display is half the height of the total virtual desktop height.



Vertical Span Mode

**(4) Configured independently from each other
(Dualview)**

Dualview mode indicates that both displays in the display pair function as one virtual desktop. Unlike Horizontal Span or Vertical Span mode, Dualview treats each display as a separate device. This means that the taskbar will not be stretched across displays and 3D applications are not accelerated as efficiently as when the application spans displays.




Dualview Mode

Display Matrix	Model	GV-NX84S256HP/GV-NX84S256HE/GV-NX84S512HP/GV-NX84S512H
	CRT+TV	Yes
	CRT+DVI	Yes
	DVI+TV	Yes
	DVI+TV+CRT	No

Video & Television

Video and television features are similar to those for analog and digital displays and include features specific to television and HDTV (high definition television) technology for optimal viewing. Tasks in the Video & Television pages allow you to do the following:

- Adjust your television picture quality and video color settings for the best possible viewing in its environment.
- Change the position and size of the desktop video to best fit your television or HDTV (high definition television) screen.
- Change the signal format to use for your standard television or HDTV as well as change country-specific signal or the HDTV format.
- Enable full screen video mirroring.

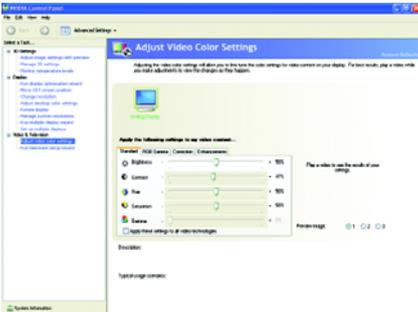

■ **Adjust Video Color Settings**

Use the controls on this page to fine tune the color settings for video content on your display. Select one of the test images to monitor your changes. For best results, play a video while you make adjustment to view the changes as they happen.




■ Run Television Setup Wizard ^(Note)

The wizard will guide you through the steps to configure your television for use with your computer.


HDTV Setup (for GV-NX84S256HP/GV-NX84S512HP only)

Follow the steps below to connect an HDTV to your system using the included component video adapter.



Step 1:

Connect the HDTV component cable to the adapter according to the corresponding color. (Y= Green, Pr= Red, Pb= Blue). Connect the TV Out cable from the adapter to the TV Out port on your graphics card.

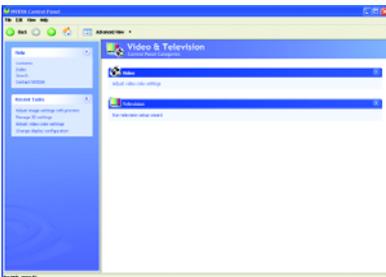

Step 2:


Go to NVIDIA Control Panel. Select the **Run television setup wizard** ^(Note) item in the **Video & Television** page.



Step 3:

When the Television Setup Wizard appears, click **Next**.


(Note) This item will show up when you connect a television.

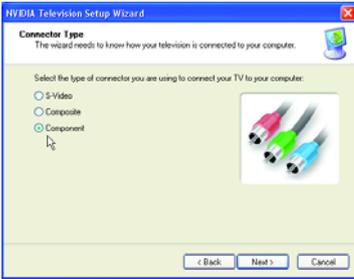

Step 4:
Select **Component** in the **Connector Type** screen.



Step 5:
Select a definition type for your HDTV (depending on the specifications of your HDTV) and click **Next**.

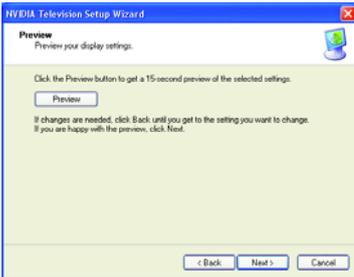

Step 6:
Click the **Preview** button to preview the selected settings. Then click **Next**.




Step 7:
Click **Finish** to apply the new television settings.

3.1.7. nView Properties Pages ^(Note)


nView is a set of desktop tools designed to help you be more productive when using your graphics card. With nView you can set up multiple desktops to work with your applications. Multiple desktops give you extra desktop areas on which to run your applications so you won't have to crowd several open application windows on one desktop.

Enabling the nView Desktop Manager Features:

Click the NVIDIA icon  in your system tray and select nView Properties under nView Desktop Manager. Click the Enable button to turn on all the nView Desktop Manager features.

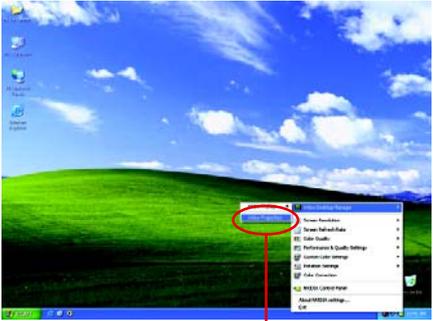


Step 1: Click nView Properties.



Step 2: Click Enable.

Accessing the nView Properties Pages:

To access the nView properties page, you can click the NVIDIA icon  in your system tray and select nView Properties under nView Desktop Manager.

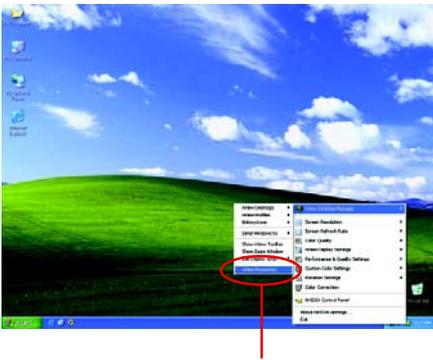

Click the item to start configuring nView features.

(Note) This item will show up when you connect two monitors.

nView Desktop Management properties



- This tab contains information about the nView Desktop Manager. The Setup Wizard can also be accessed from this tab.

nView Profiles properties



- This tab contains a record of all nView display settings for easy software setup.

nView Windows properties



- This tab allows you to control window and dialog box placement when using multiple monitors.

nView Applications properties



- This tab allows you to control nView settings depending on different applications.

nView Desktops properties



- This tab allows you to create up to 32 unique desktops.

nView User Interface properties



- This tab allows for customization of the nView user interface.

nView Effects properties



- This tab provides special windows effects that you can apply to your applications.

nView Zoom properties



- This tab provides dynamic zoom functionality on the desktop. Also enable full screen video playback via the video mirroring control button.

nView Hot Keys properties



- This tab lets you perform various actions with shortcut keys or key combinations.

nView Mouse properties



- This tab can modify and extend mouse behavior with kinematic actions.

nView Tools properties



- This tab can improve nView functionality for mobile and desktop users.

3.2. Windows® 2000 Driver Installation

With Windows running on your computer, you need to install the graphics card driver to take advantage of the higher performance, resolutions, and special graphics features of the graphics card. To ensure you install the latest driver, insert the driver CD-ROM that came with your graphics card.

To install the graphics card driver for Windows 2000, please insert the driver CD-ROM. Then the autorun window will show up. Click the Install Display Driver item, and follow the wizard to install the driver.

If the autorun window does not show up automatically, run the following steps:

1. On the menu bar, click the **Start** button.
2. Select **Run**.
3. Type the following: D:\SETUP.exe
(If D is not your CD-ROM drive, substitute D with the correct drive letter.)
4. Click **OK**.
5. Click **Install Display Drivers** to start the Installation Wizard.
6. Click **Next**.
7. Click **Yes** to the license agreement.
8. Follow the Wizard's on-screen instructions to complete the installation.



Please make sure the Windows® 2000 has installed Windows® 2000 Service Pack (or later) before installing the graphics card driver.

4. Troubleshooting Tips

The following troubleshooting tips may help if you experience problems. Contact your dealer or GIGABYTE for more advanced troubleshooting information.

- Check that the card is seated properly in the PCI Express x16 slot.
- Ensure that the display cable is securely fastened to the card's display connector.
- Make sure that the monitor and computer are plugged in and receiving power.
- If necessary, disable any built-in graphics capabilities on your motherboard. For more information, consult your computer's manual or manufacturer.
(NOTE: Some manufacturers do not allow the built-in graphics to be disabled or to become the secondary display.)
- Make sure you selected the appropriate display device and graphics card when you install the graphics driver.
- Restart your computer.
Press <F8> on your keyboard after system starts up. When the Windows Advanced Options Menu appears, select Safe Mode and press <Enter>.
After getting into Safe Mode, in Device Manager check whether the driver for the graphics card is correct.
- For more assistance, use the Troubleshooting Guide located in the Windows Help or contact your computer manufacturer.
- If you are not able to find the desired monitor color/resolution settings:
The color and screen resolution options available for selection depend on the graphics card being installed.



If necessary, adjust your monitor's setting using monitor's adjust panel to make the screen look focused, crisp, and sharp. (Please refer to the monitor's manual.)

5. Appendix

5.1. How to Reflash the BIOS in MS-DOS Mode

1. Extract the downloaded Zip file to your hard disk(s) or floppy disk. This procedure assumes drive A.
2. Restart the computer in MS-DOS mode. (For Windows 2000/XP, you need a startup disk to restart the computer in MS-DOS mode.)
3. Change the command prompt to A:\>.
4. To back up the current BIOS, at the A:\> prompt, type `[BIOS flash utility name] -s [BIOS file name]` (example: `gvf19 -s x84s2hp.f1`) and press **Enter**.
5. To flash BIOS, at the A:\> prompt, type `[BIOS flash utility name] -p [BIOS file name]` (example: `gvf19 -p x84s2hp.f2`) and press **Enter**.
6. Wait until it's done, then restart your computer.

5.2. Resolutions and Color Depth Tables (In Windows XP)

GeForce 8400 GS Single Display Standard Modes

Display Screen Resolution	Refresh Rate (Hz)	Color Depth (bpp)		
		8bpp(256 color) Standard mode	16bpp(65K color) High mode	32bpp(16.7M) True mode
320 x 200	60-75	✓	✓	✓
320 x 240	60-75	✓	✓	✓
400 x 300	60-75	✓	✓	✓
480 x 360	60-75	✓	✓	✓
512 x 384	60-75	✓	✓	✓
640 x 400 (16:10)	60-75	✓	✓	✓
640 x 480	60-240	✓	✓	✓
720 x 480	60	✓	✓	✓
720 x 576	50-60	✓	✓	✓
800 x 600	60-240	✓	✓	✓
848 x 480	60-240	✓	✓	✓
960 x 600 (16:10)	60-240	✓	✓	✓
1024 x 768	60-200	✓	✓	✓
	240	✓	✓	X
1088 x 612 (16:9)	60-200	✓	✓	✓
	240	✓	✓	X
1152 x 864	60-170	✓	✓	✓
	200	✓	✓	X
1280 x 720 (16:9)	60-150	✓	✓	✓
	170	✓	✓	X
1280 x 768	60-150	✓	✓	✓
	170	✓	✓	X
1280 x 800	60-150	✓	✓	✓
	170	✓	✓	X
1280 x 960	60-150	✓	✓	✓
	170	✓	✓	X
1280 x 1024	60-150	✓	✓	✓
	170	✓	✓	X
1360 x 768	60-150	✓	✓	✓
	170	✓	✓	X
1600 x 900 (16:9)	60-120	✓	✓	✓
	140-150	✓	✓	X
1600 x 1024	60-100	✓	✓	✓
	120	✓	✓	X

To be continued...

Display Screen Resolution	Refresh Rate (Hz)	Color Depth (bpp)		
		8bpp(256 color) Standard mode	16bpp(65K color) High mode	32bpp(16.7M) True mode
1600 x 1200	60-100	✓	✓	✓
	120	✓	✓	X
1920 x 1080 (16:9)	60-85	✓	✓	✓
	100	✓	✓	X
1920 x 1200 (16:10)	60-85	✓	✓	✓
	100	✓	✓	X
1920 x 1440	60-85	✓	✓	✓
2048 x 1536	60-85	✓	✓	✓
2560 x 1600 (Dual-Link)	60	✓	✓	✓

* This table is for reference only. The actual resolutions supported depend on the monitor you use.

5.3. Regulatory Statements

Regulatory Notices

This document must not be copied without our written permission, and the contents there of must not be imparted to a third party nor be used for any unauthorized purpose. Contravention will be prosecuted. We believe that the information contained herein was accurate in all respects at the time of printing. GIGABYTE cannot, however, assume any responsibility for errors or omissions in this text. Also note that the information in this document is subject to change without notice and should not be construed as a commitment by GIGABYTE.

Our Commitment to Preserving the Environment

In addition to high-efficiency performance, all GIGABYTE motherboards fulfill European Union regulations for RoHS (Restriction of Certain Hazardous Substances in Electrical and Electronic Equipment) and WEEE (Waste Electrical and Electronic Equipment) environmental directives, as well as most major worldwide safety requirements. To prevent releases of harmful substances into the environment and to maximize the use of our natural resources, GIGABYTE provides the following information on how you can responsibly recycle or reuse most of the materials in your "end of life" product.

Restriction of Hazardous Substances (RoHS) Directive Statement

GIGABYTE products have not intended to add and safe from hazardous substances (Cd, Pb, Hg, Cr+6, PBDE and PBB). The parts and components have been carefully selected to meet RoHS requirement. Moreover, we at GIGABYTE are continuing our efforts to develop products that do not use internationally banned toxic chemicals.

Waste Electrical & Electronic Equipment (WEEE) Directive Statement

GIGABYTE will fulfill the national laws as interpreted from the 2002/96/EC WEEE (Waste Electrical and Electronic Equipment) directive. The WEEE Directive specifies the treatment, collection, recycling and disposal of electric and electronic devices and their components. Under the Directive, used equipment must be marked, collected separately, and disposed of properly.

WEEE Symbol Statement



The symbol shown below is on the product or on its packaging, which indicates that this product must not be disposed of with other waste. Instead, the device should be taken to the waste collection centers for activation of the treatment, collection, recycling and disposal procedure. The separate collection and recycling of your waste equipment at the time of disposal will help to conserve natural resources and ensure that it is recycled in a manner that protects human health and the environment. For more information about where you can drop off your waste equipment for recycling, please contact your local government office, your household waste disposal service or where you purchased the product for details of environmentally safe recycling.

- When your electrical or electronic equipment is no longer useful to you, "take it back" to your local or regional waste collection administration for recycling.
- If you need further assistance in recycling, reusing in your "end of life" product, you may contact us at the Customer Care number listed in your product's user's manual and we will be glad to help you with your effort.

Finally, we suggest that you practice other environmentally friendly actions by understanding and using the energy-saving features of this product (where applicable), recycling the inner and outer packaging (including shipping containers) this product was delivered in, and by disposing of or recycling used batteries properly. With your help, we can reduce the amount of natural resources needed to produce electrical and electronic equipment, minimize the use of landfills for the disposal of "end of life" products, and generally improve our quality of life by ensuring that potentially hazardous substances are not released into the environment and are disposed of properly.

China Restriction of Hazardous Substances Table

The following table is supplied in compliance with China's Restriction of Hazardous Substances (China RoHS) requirements:



关于符合中国《电子信息产品污染控制管理办法》的声明
 Management Methods on Control of Pollution from Electronic Information Products
 (China RoHS Declaration)

产品中有毒有害物质或元素的名称及含量
 Hazardous Substances Table

部件名称 (Parts)	有毒有害物质或元素 (Hazardous Substances)					
	铅 (Pb)	汞 (Hg)	镉 (Cd)	六价铬 (Cr (VI))	多溴联苯 (PBB)	多溴二苯醚 (PBDE)
PCB板 PCB	○	○	○	○	○	○
结构件及风扇 Mechanical parts and Fan	×	○	○	○	○	○
芯片及其他主动零件 Chip and other Active components	×	○	○	○	○	○
连接器 Connectors	×	○	○	○	○	○
被动电子元件 Passive Components	×	○	○	○	○	○
线材 Cables	○	○	○	○	○	○
焊接金属 Soldering metal	○	○	○	○	○	○
助焊剂, 散热膏, 标签及其他耗材 Flux, Solder Paste, Label and other Consumable Materials	○	○	○	○	○	○
○: 表示该有毒有害物质在该部件所有均质材料中的含量均在SJ/T11363-2006标准规定的限量要求以下。 Indicates that this hazardous substance contained in all homogenous materials of this part is below the limit requirement SJ/T 11363-2006						
×: 表示该有毒有害物质至少在该部件的某一均质材料中的含量超出SJ/T11363-2006标准规定的限量要求。 Indicates that this hazardous substance contained in at least one of the homogenous materials of this part is above the limit requirement in SJ/T 11363-2006						
对销售之日的所发售产品, 本表显示我公司供应链的电子信息产品可能包含这些物质。注意: 在所售产品中可能会也可能不会含有所有列出的部件。 This table shows where these substances may be found in the supply chain of our electronic information products, as of the date of the sale of the enclosed products. Note that some of the component types listed above may or may not be a part of the enclosed product.						

